

HYDRAULIC SCISSOR

COMMERCIAL LIFT

Great performance and the perfect choice for your commercial service.



SCISSOR LIFT


SPECIFICATIONS


AX-12

AX-12A

AX-16A

Model		AX-12	AX-12A	AX-16A
Lifting Capacity		12,000lbs	12,000lbs	16,000lbs
Lifting Time		75S	75S	110S
Max. Lifting Height	Α	73 5/8" (1870mm)	73 5/8" (1870mm)	73 5/8" (1870mm)
Min. Height		11 3/4" (300mm)	11 3/4" (300mm)	13" (330mm)
Runway Lenght	В	197 1/2" (5018mm)	197 1/2" (5018mm)	213 3/4" (5428mm)
Overall Width	С	90 1/8" (2290mm)	90 1/8" (2290mm)	94 1/8" (2390mm)
Width Between Runways	D	41" (1040mm)	41" (1040mm)	44 7/8" (1140mm)
Overall Length (Inc.Ramps)	Е	267" (6784mm)	258" (6554mm)	274 1/8" (6964mm)
Min. Four Wheel Align	F	1	81 7/8"(2080mm)	98"(2490mm)
Max. Four Wheel Align	G	1	167 3/4"(4260mm)	184 1/2"(4680mm)
Max. Two Wheel Align	Н	1	174"(4420mm)	190 1/2"(4840mm)
Gross Weight		4,925lbs (2259kg)	5,785lbs (2624kg)	6,345lbs (2878kg)
Motor		2.0HP, 220V/60Hz,single phase		



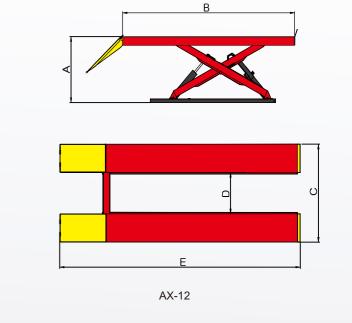

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA





HYDRAULIC SCISSOR

ALIGNMENT LIFT

This heavy-duty scissor lift has the support of four cylinders and each dual cylinder are designed to work synchronously.

- $\sqrt{2}$ dual synchronous cylinders are used to assure the optimal lifting level on both platforms.
- \checkmark Electronic-air control system, which operates the self-locking safety mechanism.
- √ Heavy-duty design, the X serial scissor lift uses a 5 7/8" x 3" (150 x 75mm) tube to make it strong and assures the runways remain level during operation.
- √ Skid proof diamond platform provides traction for the tires to stay put.
- √ Optional rolling jacks:

J6H: 6,000 lbs with manual pump

J6A: 6,000 lbs with pneumatic pump RJ-8A: 8,000 lbs with pneumatic pump

√ More choices:

Optional turnplate Kits No. 40101 (AX-12A) (AX-16A)

Optional led lights Kits No. PX010

Optional extension Kits No. PX001 (AX-12)/PX002 (AX-12A)/PX003(AX-16A)

Optional airline Kits No. Px004



FEATURES




· Mechanical lock and air-driven safety release.



· Pull-out shelf for extra room allows more effective working environments




 Optional LED lights provide extra and efficient lighting for underneath the vehicle. Kits No.:PX010.



• Optional extension kits to extend the platform 11 7/8" (300mm). Kits No.:PX001(AX-12) Kits No.:PX002(AX-12A)

Kits No.:PX003(AX-16A)



with a pneumatic pump. Kits No.:PX004